

LIFE OF ALUMINUM ELECTROLYTIC CAPACITORS 貼片式鋁電解電容器

The life of aluminum electrolytic capacitors is mainly dependent on environmental conditions (e.g. ambient temperature, humidity etc.) and electrical factors (e.g. operating temperature, ripple current etc.). Generally, the wear-out mechanism of aluminum electrolytic capacitors is based on evaporation of electrolyte through the rubber seal. Consequently, the factor of temperature (ambient temperature and internal heating due to ripple current) is the most critical to electrolytic capacitors life. The effect of voltage on capacitor life is negligible, especially for low voltage electrolytic capacitors. The lifetime of aluminum electrolytic capacitors can be expressed as following equations.

鋁電解電容器的壽命主要依賴於其適用的環境條件（如溫度、濕度等）和電負荷情況（如工作電壓、紋波電流等）。通常而言，鋁電解電容器的失效機理被認為是電解液通過膠塞逐漸揮發所導致。因此，溫度因素（環境溫度和由於紋波電流所引致的內熱）對電容器壽命的影響最大，而電壓對電容器壽命的影響可以忽略，尤其對低電壓鋁電解電容器更是如此。鋁電解電容器的壽命可用下列公式來估算：

$$L_e = L_o \cdot K_t \cdot K_r$$

Where: 其中:

L_e =Expected life at operating temperature T_e (h) 在工作溫度 T_e (h)下的預期壽命

L_o =Specified life at maximum operating temperature T_o (h) 在最大工作溫度 T_o (h)下的壽命

K_t =Ambient temperature acceleration term 環境溫度影響因子

K_r =Ripple current acceleration term 紋波電流影響因子

$$K_t = L_o \cdot A^{(T_o - T_e)/10}$$

Where: 其中:

T_o =Maximum rated operating temperature(°C) 最大額定工作電壓溫度 (°C)

T_e =Actual ambient temperature(°C) 實際環境適用溫度 (°C)

A =Acceleration coefficient (for the range from 35°C to the maximum operating temperature, $A \approx 2$)
加速係數 (對於從 35°C到最高工作溫度的範圍, $A \approx 2$)

$$K_r = 2^{(-\Delta T/5)}$$

Where: 其中:

ΔT =An increase in core temperature by internal heating due to ripple current
由於紋波電流引起的內熱造成電容器芯子的升溫

(ΔT =core temperature – ambient temperature) (ΔT =芯子溫度 – 環境溫度)

ΔT can be estimated as follows: ΔT 可用以下公式估算:

$$\Delta T = (I^2 \cdot R) / (\beta \cdot S)$$

Where: 其中:


I =Ripple current of the capacitor (A rms) 通過電容器的紋波電流 (A rms)

R =Equivalent series resistance of the capacitor (Ω) 電容器的等效串聯電阻 (Ω)

β =Heat radiation coefficient of the aluminum can ($W/^\circ C \cdot cm^2$) 鋁殼的熱輻射係數 ($W/^\circ C \cdot cm^2$)


S =Surface area of the capacitor (cm^2) 電容器的表面積 (cm^2)

Quick Reference Guide of the Expected Life 預期壽命快速參考

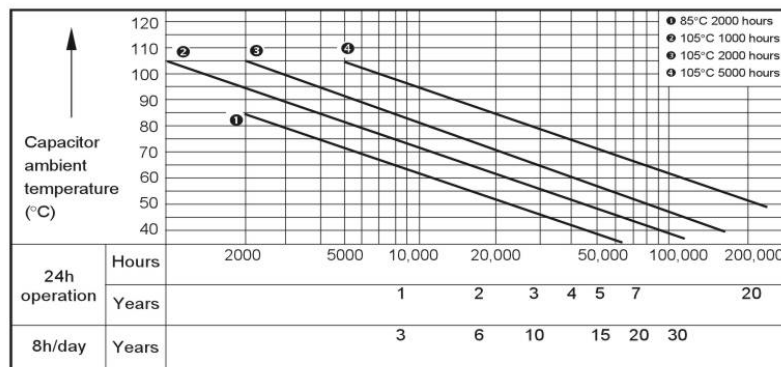

NOTE: All designs and specifications are for reference only and are subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注: 以上所提供的設計及特性參數僅供參考作用, 任何修改不作預先通知。如果在使用上有疑問, 請在採購前與我們聯絡, 以便提供技術上的協助。



SEMTECH ELECTRONICS LTD.
(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

