

# KBU8A THRU KBU8M

## SINGLE PHASE SILICON BRIDGE RECTIFIERS

Reverse Voltage - 50 to 1000 V


Forward Current - 8 A

### Features

- High surge current capability
- Ideal for printed circuit board
- Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- Reliable low cost construction utilizing molded plastic technique

### Mechanical Data

- Case: Molded plastic, KBU
- Epoxy: UL 94V-0 rate flame retardant
- Terminals: Leads solderable per MIL-STD-202 method 208 guaranteed
- Mounting position: Any

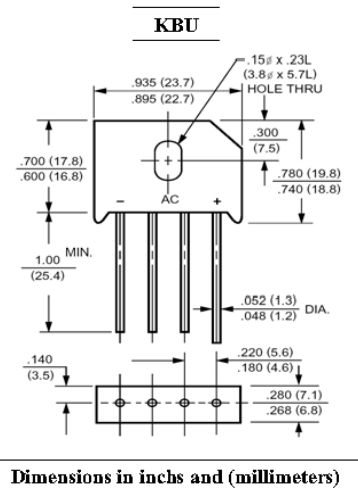


### Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	KBU8A	KBU8B	KBU8D	KBU8G	KBU8J	KBU8K	KBU8M	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 0.375" (9.5 mm) Leaded Length at $T_A = 65^\circ\text{C}$	$I_{F(AV)}$	8							A
Peak Forward Surge Current, 8.3 ms Single Half-Sine-wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	300							A
Maximum Forward Voltage at 8 A	$V_F$	1.1							V
Maximum Reverse Current at Rated DC Blocking Voltage $T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$	$I_R$	10 500							$\mu\text{A}$
Typical Thermal Resistance <sup>1)</sup>	$R_{\theta JA}$	18							$^\circ\text{C/W}$
Typical Thermal Resistance <sup>2)</sup>	$R_{\theta JC}$	3							$^\circ\text{C/W}$
Operating and Storage Temperature Range	$T_j, T_{stg}$	- 55 to + 125							$^\circ\text{C}$

<sup>1)</sup> Units mounted in free air, no heatsink, P.C.B at 0.375" (9.5 mm) lead length with 0.5 X 0.5" (12 X 12 mm) copper pads.

<sup>2)</sup> Units mounted on a 3 X 3" X 0.11" thick (7.5 X 7.5 X 0.3 cm) Al. Plate heatsink.



**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



# KBU8A THRU KBU8M

FIG.1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

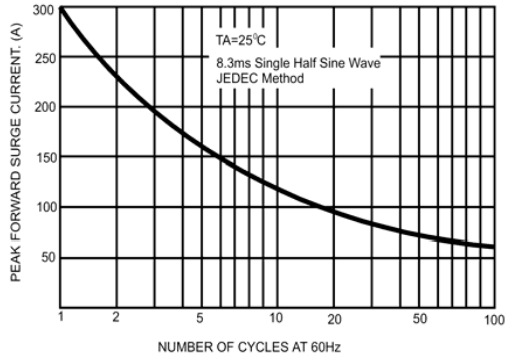


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

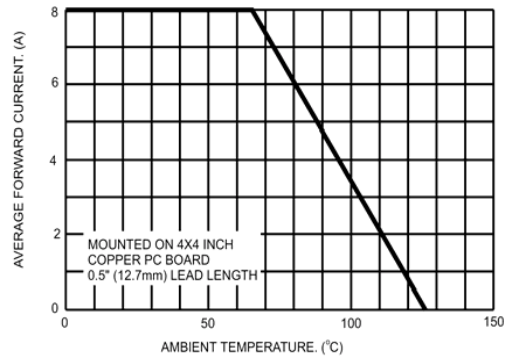


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT



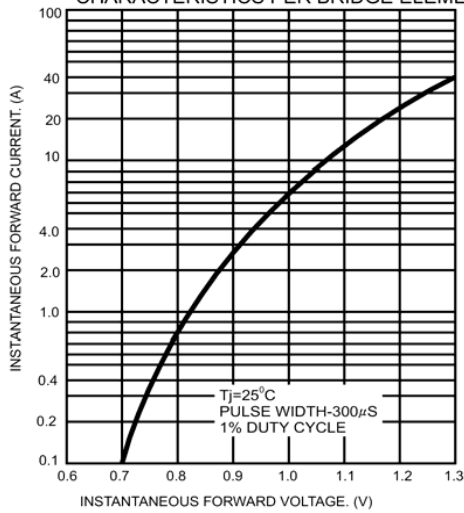


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT



## SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

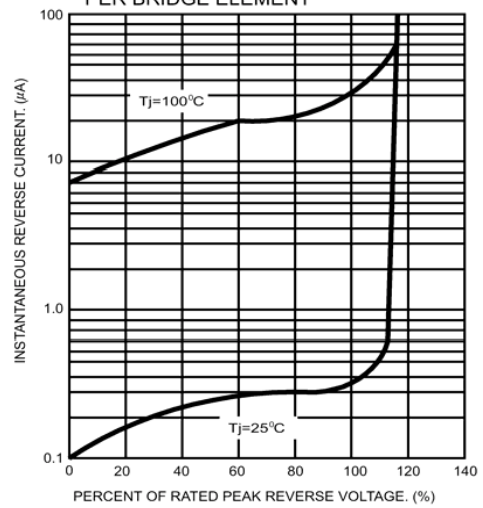