

# SMAJxxD Series

## Surface Mount Transient Voltage Suppressors

### Features


- Plastic package has UL Flammability Classification 94V-0
- Very fast reponse time

### Mechanical Data

- Case: SMA( DO-214AC) molded plastic
- Polarity: Color band denotes cathode end except Bipolar
- Mounting Position: Any

### Description

- Devices for bidirectional applications
- For bidirectional use CA suffix
- Electrical characteristics apply in both directions

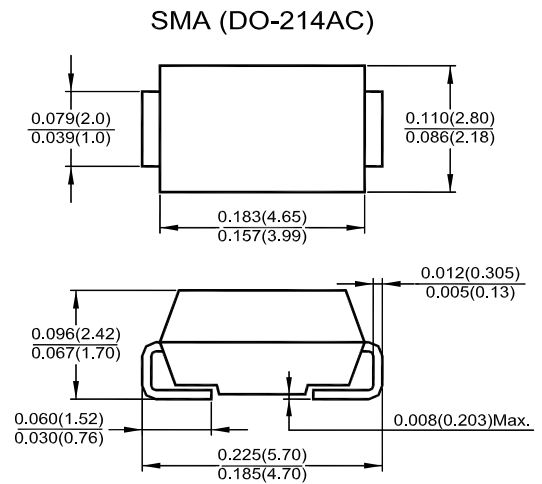


Dimensions in inches and (millimeters)

### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation with a 10/1000 $\mu\text{s}$ Waveform <sup>1)</sup>	$P_{PPM}$	Min. 400	W
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method) <sup>2)</sup>	$I_{FSM}$	40	A
Maximum Instantaneous Forward Voltage (Unidirectional only) at 25 A	$V_F$	3.5	V
Operating Junction and Storage Temperature Range	$T_j, T_{stg}$	- 55 to + 150	$^\circ\text{C}$

<sup>1)</sup> Non-repetitive current pulse and derated above  $T_a = 25\text{ }^\circ\text{C}$ .

<sup>2)</sup> Mounted on copper lead area at  $5\text{ mm}^2$  (0.013 mm thick).




**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited



# SMAJxxD Series

## Electrical Characteristics ( $T_a = 25\text{ }^\circ\text{C}$ unless otherwise specified)

Uni-directional / Bi-directional Type <sup>3)</sup>	Stand-off Voltage $V_{WM}$ (V)	Breakdown Voltage <sup>1)</sup>		Test Current $I_T$ (mA)	Maximum Clamping Voltage $V_C$ (V) at $I_{PPM}$	Maximum Peak Pulse Current $I_{PPM}$ (A)	Maximum Reverse Leakage <sup>2)</sup> $I_D$ ( $\mu$ A) at $V_{WM}$
		$V_{BR}$ (V) Min. at $I_T$	$V_{BR}$ (V) Max. at $I_T$				
SMAJ5.0D / CD	5	6.4	7.82	10	9.6	41.7	800
SMAJ5.0AD / CAD	5	6.4	7.07	10	9.2	43.5	800
SMAJ6.0D / CD	6	6.67	8.15	10	11.4	35.1	800
SMAJ6.0AD / CAD	6	6.67	7.37	10	10.3	38.8	800
SMAJ6.5D / CD	6.5	7.22	8.82	10	12.3	32.5	500
SMAJ6.5AD / CAD	6.5	7.22	7.98	10	11.2	35.7	500
SMAJ7.0D / CD	7	7.78	9.51	10	13.3	30.1	200
SMAJ7.0AD / CAD	7	7.78	8.6	10	12	33.3	200
SMAJ7.5D / CD	7.5	8.33	10.2	1	14.3	28	100
SMAJ7.5AD / CAD	7.5	8.33	9.21	1	12.9	31	100
SMAJ8.0D / CD	8	8.89	10.9	1	15	26.7	50
SMAJ8.0AD / CAD	8	8.89	9.83	1	13.6	29.4	50
SMAJ8.5D / CD	8.5	9.44	11.5	1	15.9	25.2	10
SMAJ8.5AD / CAD	8.5	9.44	10.4	1	14.4	27.8	10
SMAJ9.0D / CD	9	10	12.2	1	16.9	23.7	5
SMAJ9.0AD / CAD	9	10	11.1	1	15.4	26	5
SMAJ10D / CD	10	11.1	13.6	1	18.8	21.3	1
SMAJ10AD / CAD	10	11.1	12.3	1	17	23.5	1
SMAJ11D / CD	11	12.2	14.9	1	20.1	19.9	1
SMAJ11AD / CAD	11	12.2	13.5	1	18.2	22	1
SMAJ12D / CD	12	13.3	16.3	1	22	18.2	1
SMAJ12AD / CAD	12	13.3	14.7	1	19.9	20.1	1
SMAJ13D / CD	13	14.4	17.6	1	23.8	16.8	1
SMAJ13AD / CAD	13	14.4	15.9	1	21.5	18.6	1
SMAJ14D / CD	14	15.6	19.1	1	25.8	15.5	1
SMAJ14AD / CAD	14	15.6	17.2	1	23.2	17.2	1
SMAJ15D / CD	15	16.7	20.4	1	26.9	14.9	1
SMAJ15AD / CAD	15	16.7	18.5	1	24.4	16.4	1
SMAJ16D / CD	16	17.8	21.8	1	28.8	13.9	1
SMAJ16AD / CAD	16	17.8	19.7	1	26	15.4	1
SMAJ17D / CD	17	18.9	23.1	1	30.5	13.1	1
SMAJ17AD / CAD	17	18.9	20.9	1	27.6	14.5	1
SMAJ18D / CD	18	20	24.4	1	32.2	12.4	1
SMAJ18AD / CAD	18	20	22.1	1	29.2	13.7	1
SMAJ20D / CD	20	22.2	27.1	1	35.8	11.2	1
SMAJ20AD / CAD	20	22.2	24.5	1	32.4	12.3	1
SMAJ22D / CD	22	24.4	29.8	1	39.4	10.2	1
SMAJ22AD / CAD	22	24.4	26.9	1	35.5	11.3	1
SMAJ24D / CD	24	26.7	32.6	1	43	9.3	1
SMAJ24AD / CAD	24	26.7	29.5	1	38.9	10.3	1
SMAJ26D / CD	26	28.9	35.3	1	46.6	8.6	1
SMAJ26AD / CAD	26	28.9	31.9	1	42.1	9.5	1
SMAJ28D / CD	28	31.1	38	1	50	8	1
SMAJ28AD / CAD	28	31.1	34.4	1	45.4	8.8	1
SMAJ30D / CD	30	33.3	40.7	1	53.5	7.5	1
SMAJ30AD / CAD	30	33.3	36.8	1	48.4	8.3	1
SMAJ33D / CD	33	36.7	44.9	1	59	6.8	1
SMAJ33AD / CAD	33	36.7	40.6	1	53.3	7.5	1
SMAJ36D / CD	36	40	48.9	1	64.3	6.2	1
SMAJ36AD / CAD	36	40	44.2	1	58.1	6.9	1
SMAJ40D / CD	40	44.4	54.3	1	71.4	5.6	1
SMAJ40AD / CAD	40	44.4	49.1	1	64.5	6.2	1
SMAJ43D / CD	43	47.8	58.4	1	76.7	5.2	1
SMAJ43AD / CAD	43	47.8	52.8	1	69.4	5.8	1



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited



# SMAJxxD Series


## Electrical Characteristics ( $T_a = 25\text{ }^\circ\text{C}$ unless otherwise specified)

Uni-directional / Bi-directional Type <sup>3)</sup>	Stand-off Voltage $V_{WM}$ (V)	Breakdown Voltage <sup>1)</sup>		Test Current $I_T$ (mA)	Maximum Clamping Voltage $V_C$ (V) at $I_{PPM}$	Maximum Peak Pulse Current $I_{PPM}$ (A)	Maximum Reverse Leakage <sup>2)</sup> $I_D$ ( $\mu\text{A}$ ) at $V_{WM}$
		$V_{BR}$ (V) Min. at $I_T$	$V_{BR}$ (V) Max. at $I_T$				
SMAJ45D / CD	45	50	61.1	1	80.3	5	1
SMAJ45AD / CAD	45	50	55.3	1	72.7	5.5	1
SMAJ48D / CD	48	53.3	65.1	1	85.5	4.7	1
SMAJ48AD / CAD	48	53.3	58.9	1	77.4	5.2	1
SMAJ51D / CD	51	56.7	69.3	1	91.1	4.4	1
SMAJ51AD / CAD	51	56.7	62.7	1	82.4	4.9	1
SMAJ54D / CD	54	60	73.3	1	96.3	4.2	1
SMAJ54AD / CAD	54	60	66.3	1	87.1	4.6	1
SMAJ58D / CD	58	64.4	78.7	1	103	3.9	1
SMAJ58AD / CAD	58	64.4	71.2	1	93.6	4.3	1
SMAJ60D / CD	60	66.7	81.5	1	107	3.7	1
SMAJ60AD / CAD	60	66.7	73.7	1	96.8	4.1	1
SMAJ64D / CD	64	71.1	86.9	1	114	3.5	1
SMAJ64AD / CAD	64	71.1	78.6	1	103	3.9	1
SMAJ70D / CD	70	77.8	95.1	1	125	3.2	1
SMAJ70AD / CAD	70	77.8	86	1	113	3.5	1
SMAJ75D / CD	75	83.3	102	1	134	3	1
SMAJ75AD / CAD	75	83.3	92.1	1	121	3.3	1
SMAJ78D / CD	78	86.7	106	1	139	2.9	1
SMAJ78AD / CAD	78	86.7	95.8	1	126	3.2	1
SMAJ85D / CD	85	94.4	115	1	151	2	1
SMAJ85AD / CAD	85	94.4	104	1	137	2.2	1
SMAJ90D / CD	90	100	122	1	160	1.9	1
SMAJ90AD / CAD	90	100	111	1	146	2.1	1
SMAJ100D / CD	100	111	136	1	179	1.7	1
SMAJ100AD / CAD	100	111	123	1	162	1.9	1
SMAJ110D / CD	110	122	149	1	196	1.5	1
SMAJ110AD / CAD	110	122	135	1	177	1.7	1
SMAJ120D / CD	120	133	163	1	214	1.4	1
SMAJ120AD / CAD	120	133	147	1	193	1.6	1
SMAJ130D / CD	130	144	176	1	231	1.3	1
SMAJ130AD / CAD	130	144	159	1	209	1.4	1
SMAJ150D / CD	150	167	204	1	268	1.1	1
SMAJ150AD / CAD	150	167	185	1	243	1.2	1
SMAJ160D / CD	160	178	218	1	287	1	1
SMAJ160AD / CAD	160	178	197	1	259	1.2	1
SMAJ170D / CD	170	189	231	1	304	0.99	1
SMAJ170AD / CAD	170	189	209	1	275	1.09	1
SMAJ180AD / CAD	180	201	222	1	292	1.4	1
SMAJ188D / CD	188	209	255	1	344	0.9	1
SMAJ188AD / CAD	188	209	231	1	328	0.91	1
SMAJ200AD / CAD	200	224	247	1	324	1.2	1
SMAJ220AD / CAD	220	246	272	1	356	1.1	1
SMAJ250AD / CAD	250	279	309	1	405	1	1
SMAJ300AD / CAD	300	335	371	1	486	0.8	1
SMAJ350AD / CAD	350	391	432	1	567	0.7	1
SMAJ400AD / CAD	400	447	494	1	648	0.6	1
SMAJ440AD / CAD	440	492	543	1	713	0.6	1

<sup>1)</sup>  $V_{BR}$  measured after  $I_T$  applied for 300  $\mu\text{s}$  square wave pulse or equivalent.

<sup>2)</sup> For bidirectional types having  $V_{RWM}$  of 10 V and less, the  $I_D$  limit is doubled.


<sup>3)</sup> For bidirectional use C or CA suffix types, the electrical characteristics apply in both directions.




**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited




**Fig. 1 – Peak Pulse Power Rating Curve**

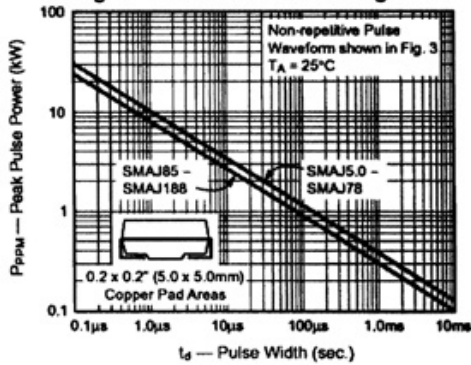


**Fig. 2 – Pulse Derating Curve**

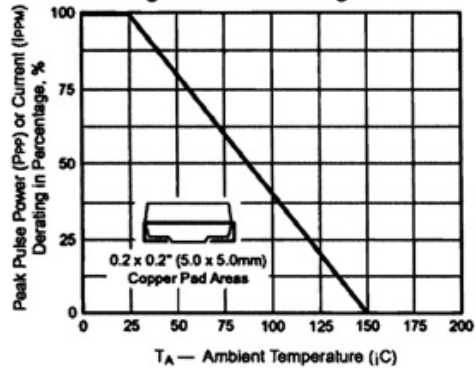


**Fig. 3 – Pulse Waveform**

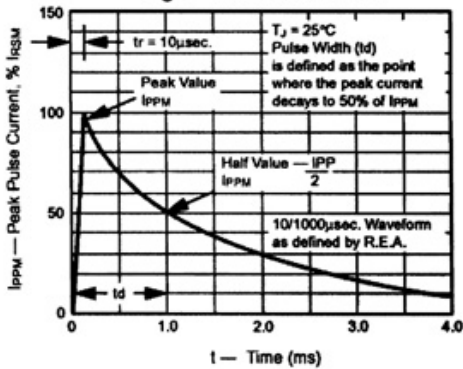

**Fig. 4 – Typical Junction Capacitance**

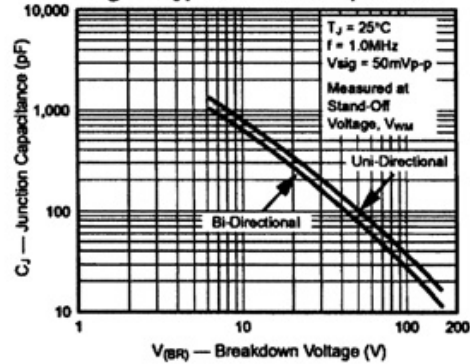

**Fig. 5 – Typical Transient Thermal Impedance**

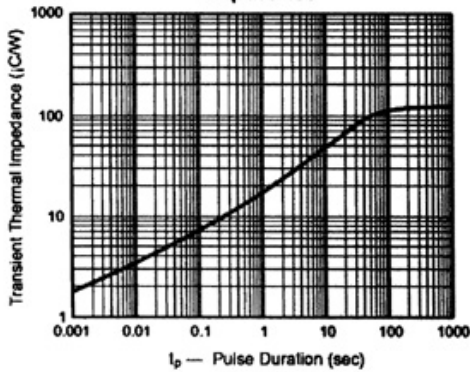

**Fig. 6 - Maximum Non-Repetitive Forward Surge Current Uni-Directional Only**

