

# MBRF2070CT THRU MBRF20100CT

## DUAL SCHOTTKY RECTIFIERS

Reverse Voltage - 70 to 100 V

Forward Current - 20 A


### Features

- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- Metal silicon junction, majority carrier conduction
- High current capability, low forward voltage drop
- Guard ring for over voltage protection

### Mechanical Data

- **Case:** ITO-220AB, molded plastic body
- **Terminals:** Solderable per MIL-STD-750, Method 2026
- **Polarity:** As marked
- **Mounting position:** Any

### ITO-220AB

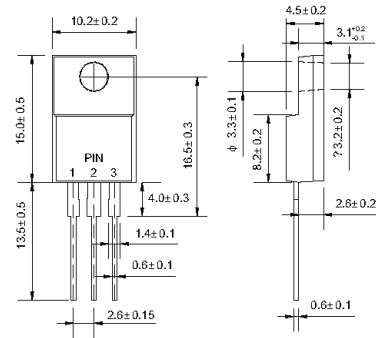

Dimensions in millimeters


### Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	MBRF2070CT	MBRF2080CT	MBRF2090CT	MBRF20100CT	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	70	80	90	100	V
Maximum Working Peak Reverse Voltage	$V_{RWM}$	49	56	63	70	V
Maximum DC Blocking Voltage	$V_{DC}$	70	80	90	100	V
Maximum Average Forward Rectified Current at $T_C = 133\text{ }^\circ\text{C}$	$I_{F(AV)}$	20				A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	$I_{FSM}$	150				A
Maximum Forward Voltage per Leg <sup>1)</sup>	$V_F$	at $I_F = 10\text{ A}, T_C = 25\text{ }^\circ\text{C}$ 0.85 at $I_F = 10\text{ A}, T_C = 125\text{ }^\circ\text{C}$ 0.7 at $I_F = 20\text{ A}, T_C = 25\text{ }^\circ\text{C}$ 0.95 at $I_F = 20\text{ A}, T_C = 125\text{ }^\circ\text{C}$ 0.85				V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$I_R$	at $T_A = 25\text{ }^\circ\text{C}$ 0.1 at $T_A = 125\text{ }^\circ\text{C}$ 6				mA
Maximum Junction Capacitance <sup>2)</sup>	$C_J$	400				pF
Operating Junction Temperature Range	$T_j$	- 55 to + 150				°C
Storage Temperature Range	$T_{stg}$	- 55 to + 175				°C


<sup>1)</sup> Pulse test: 300  $\mu\text{s}$  pulse width, 1% duty cycle.

<sup>2)</sup>  $V_R = 5\text{ V}$  (test signal range 100 KHz to 1 MHz)




**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)




# MBRF2070CT THRU MBRF20100CT


**FIG.1 – FORWARD CURRENT DERATING CURVE**

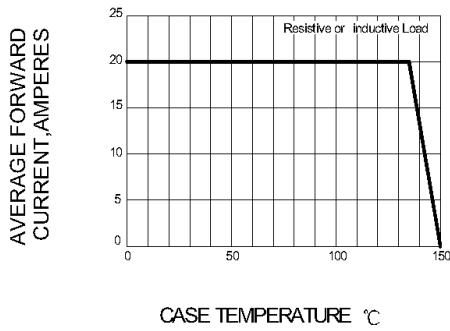


**FIG.2 – MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG**

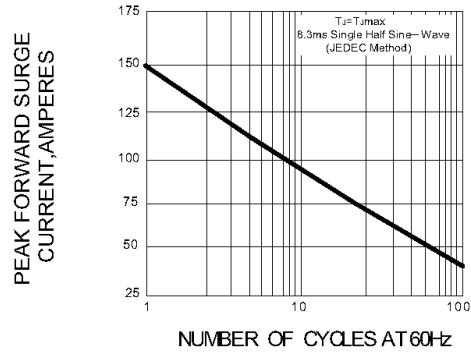



**FIG.3 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG**

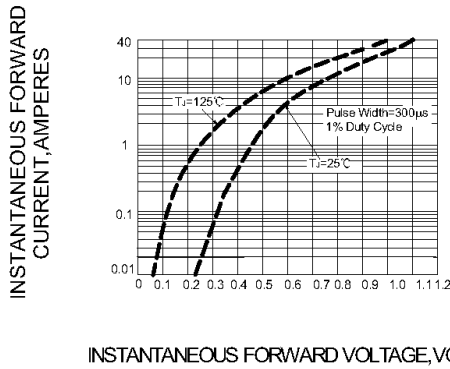

**FIG.4 – TYPICAL REVERSE CHARACTERISTICS PER LEG**

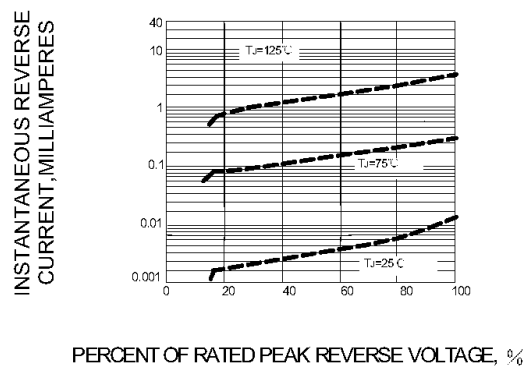

**FIG.5 – TYPICAL JUNCTION CAPACITANCE PER LEG**

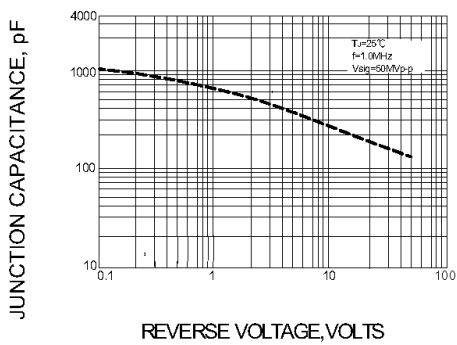

**SEMTECH ELECTRONICS LTD.**  
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

