


MMBD7000

Silicon Epitaxial Planar Switching Diode

Features

- Fast switching speed
- High Conductance



Marking Code: **A7**
SOT-23 Plastic Package

Applications


- For general purpose switching

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	100	V
Reverse Voltage	V_R	100	V
Forward Current	I_F	200	mA
Non-repetitive Peak Forward Surge Current	I_{FSM}	1 2	A
			at $t = 1\text{ s}$ at $t = 1\ \mu\text{s}$
Power Dissipation	P_d	350	mW
Junction and Storage Temperature Range	T_j, T_{stg}	- 65 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$




Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 100\ \mu\text{A}$	$V_{(BR)R}$	100	-	V
Forward Voltage at $I_F = 1\ \text{mA}$ at $I_F = 10\ \text{mA}$ at $I_F = 100\ \text{mA}$ at $I_F = 150\ \text{mA}$	V_F	0.55 0.67 0.75 -	0.7 0.82 1.1 1.25	V
Reverse Current at $V_R = 50\ \text{V}$ at $V_R = 100\ \text{V}$ at $V_R = 50\ \text{V}, T_j = 125^\circ\text{C}$	I_R	- - -	1 3 100	μA
Total Capacitance at $V_R = 0\ \text{V}, f = 1\ \text{MHz}$	C_T	-	2	pF
Reverse Recovery Time at $I_F = I_R = 10\ \text{mA}, I_{rr} = 0.1 \times I_R, R_L = 100\ \Omega$	t_{rr}	-	4	ns




SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 15/06/2009

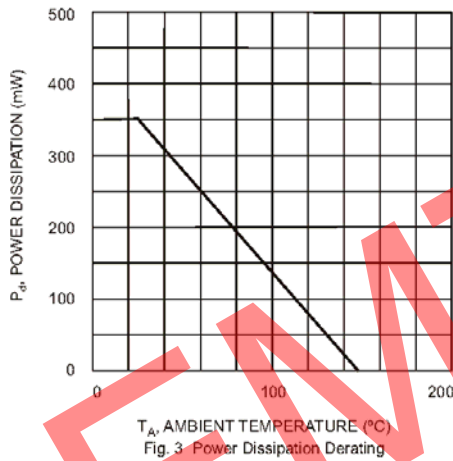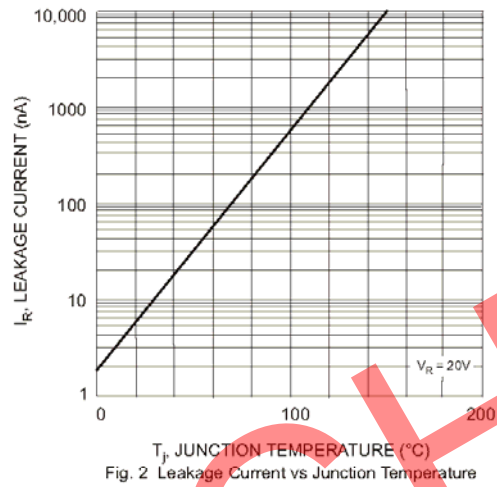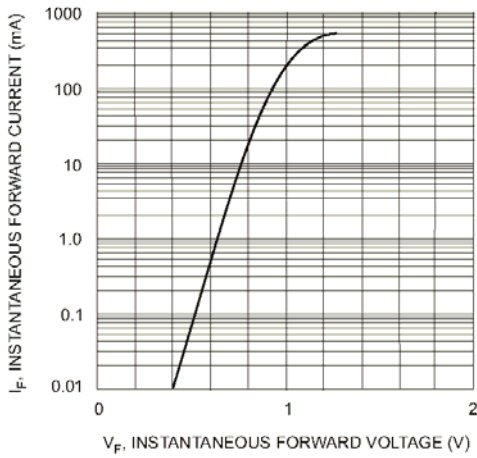

SEMTECH



SEMTECH ELECTRONICS LTD.
 Subsidiary of Sino-Tech International (BVI) Limited

