


SB060M-60

Surface Mount Schottky Barrier Rectifiers

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

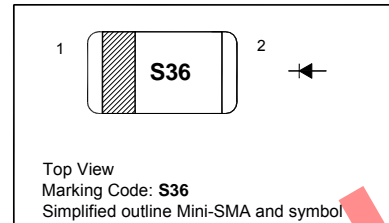


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RM}	60	V
Reverse Voltage	V_R	60	V
Average Forward Rectified Current	$I_{F(AV)}$	2	A
Non-Repetitive Peak Forward Surge Current (8.3 ms)	I_{FSM}	30	A
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 40 to + 150	$^\circ\text{C}$



Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 1\text{ A}$ at $I_F = 2\text{ A}$	V_F	0.52 0.61	V
Reverse Current at $V_R = 60\text{ V}$	I_R	50	μA




SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



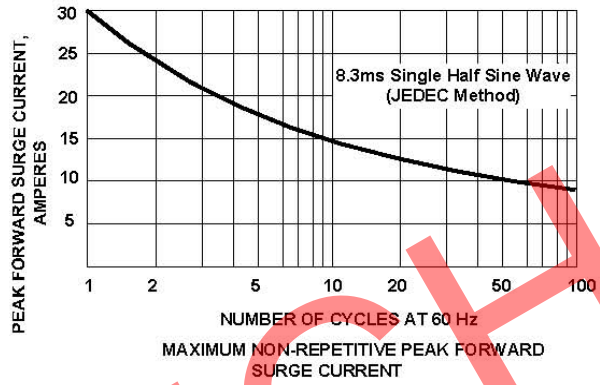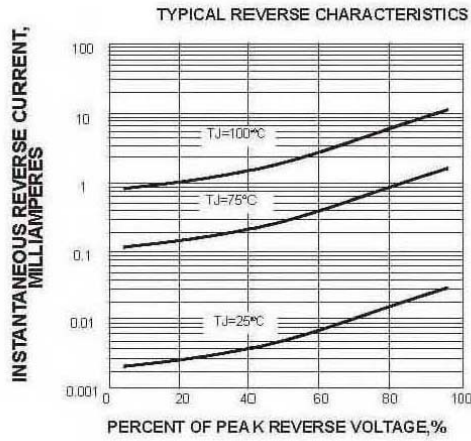

SEMTECH



SEMTECH ELECTRONICS LTD.
 Subsidiary of Sino-Tech International (BVI) Limited




SB060M-60


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

Mini-SMA

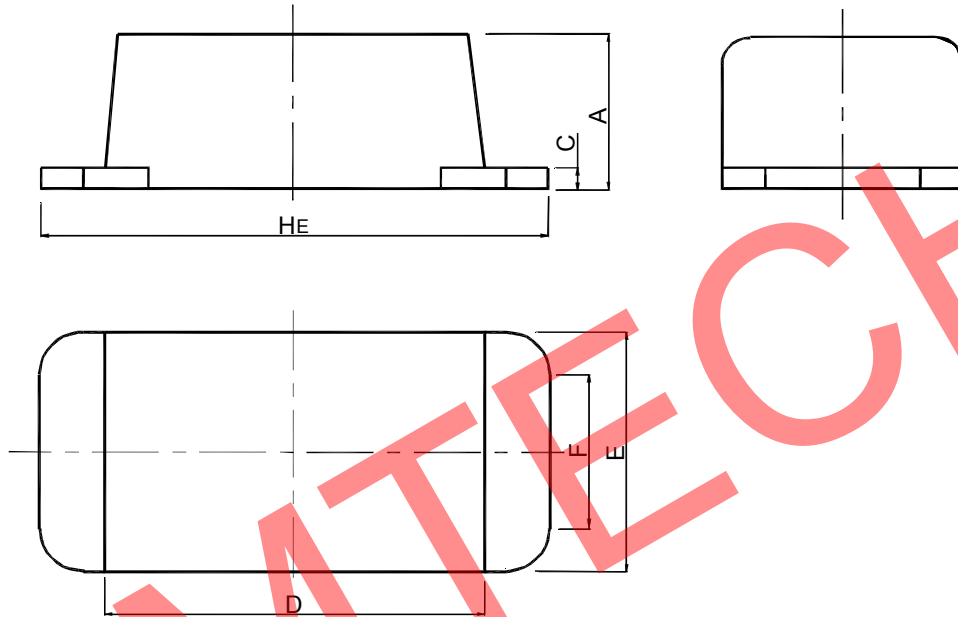

UNIT	A	C	D	E	F	H _E
mm	1.08	0.2	2.9	1.9	1.53	3.9
	0.88	0.1	2.6	1.7	1.43	3.5



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Dated: 03/05/2013 Rev: 01