

# SS22D THRU SS210D

## Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 20 to 100 V


Forward Current - 2 A

### Features

- The plastic package carries UL Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High forward surge current capability
- Built-in strain relief, ideal for automated placement

### Mechanical Data

- **Case:** SMB (DO-214AA) molded plastic body
- **Terminal:** Leads solderable per MIL-STD-750, Method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any

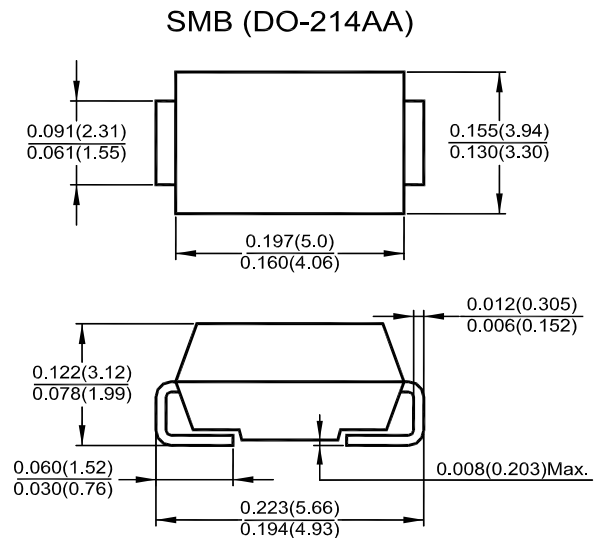

Dimensions in inches and (millimeters)


### Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	Symbols	SS22D	SS24D	SS26D	SS28D	SS210D	Unit
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	20	40	60	80	100	V
Maximum RMS Voltage	$V_{RMS}$	14	28	42	56	70	V
Maximum DC Blocking Voltage	$V_{DC}$	20	40	60	80	100	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	2					A
Peak Forward Surge Current 8.3 ms Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	50					A
Maximum Instantaneous Forward Voltage at 2 A	$V_F$	0.55		0.7		0.85	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$I_R$	0.5					mA
		20		10			
Typical Junction Capacitance <sup>1)</sup>	$C_J$	220		180			pF
Typical Thermal Resistance <sup>2)</sup>	$R_{\theta JA}$	75					°C/W
Operating Junction Temperature Range	$T_j$	- 65 to + 125		- 65 to + 150			°C
Storage Temperature Range	$T_{stg}$	- 65 to + 150					°C

<sup>1)</sup> Measured at 1 MHz and applied reverse voltage of 4 V.








<sup>2)</sup> P.C.B mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited



# SS22D THRU SS210D

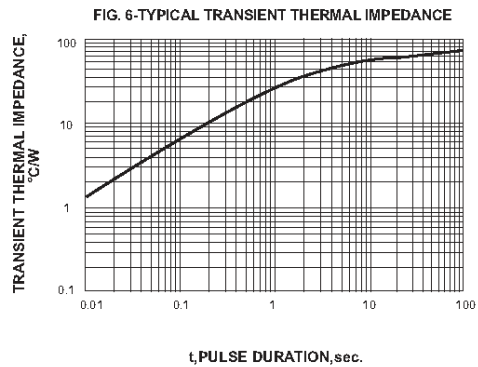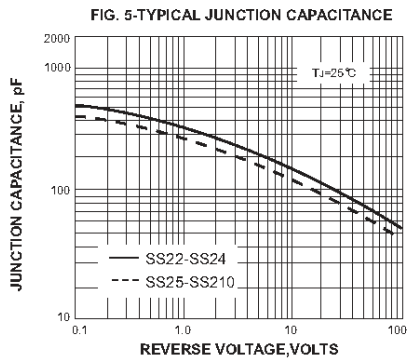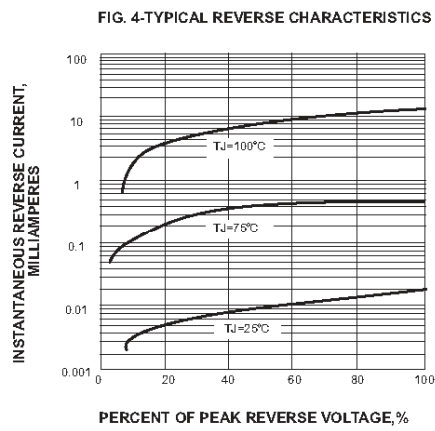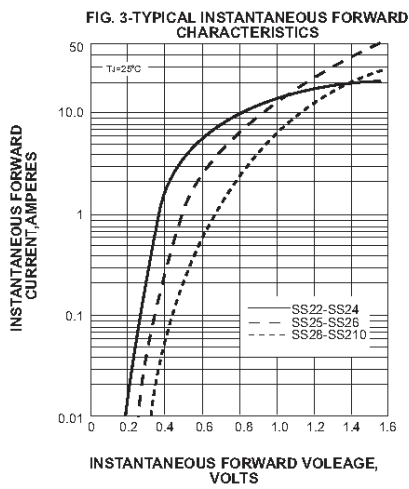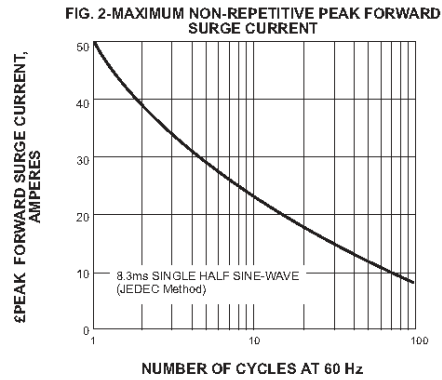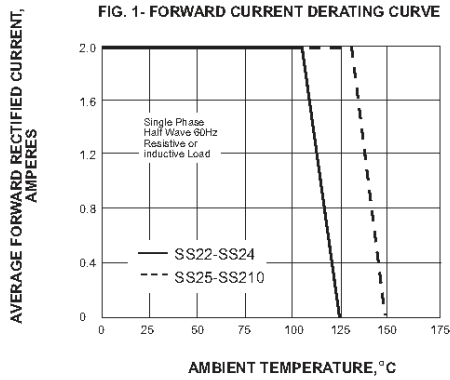

**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited

