

# S05A30 THRU S05A60

## SCHOTTKY BARRIER RECTIFIERS

Reverse Voltage – 30 to 60 Volts


Forward Current – 10.0 Amperes

### Features

- Plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed: 250°C, 0.25" (6.35mm) from case for 10 seconds

### Mechanical Data

- **Case:** Molded plastic body, TO-220AC
- **Terminals:** leads solderable per MIL-STD-750, method 2026
- **Polarity:** As marked
- **Mounting Position:** Any

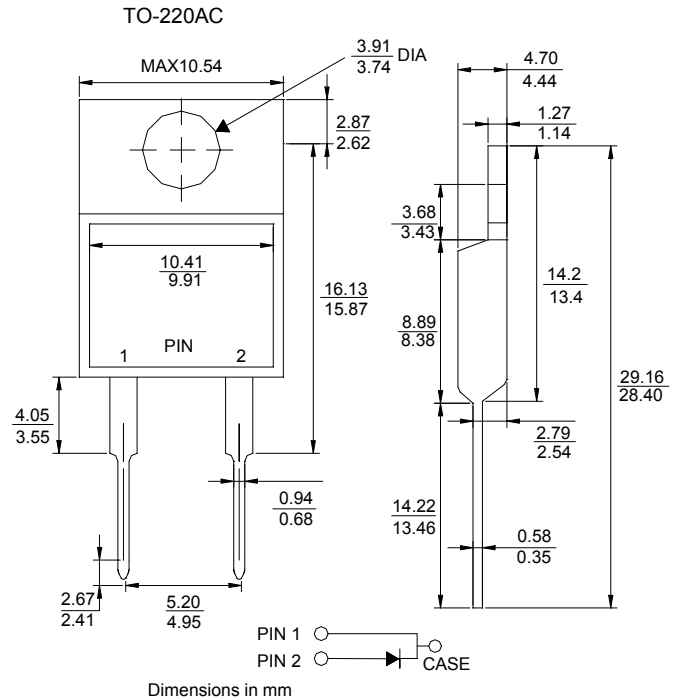


### Absolute Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load. for capacitive load current derate by 20%.


	Symbols	S05A30	S05A40	S05A45	S05A50	S05A60	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	30	40	45	50	60	V
Maximum RMS voltage	$V_{RMS}$	21	28	32	35	42	V
Maximum DC blocking voltage	$V_{DC}$	30	40	45	50	60	V
Maximum average forward rectified current	$I_{(AV)}$	10					A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	125					A
Maximum instantaneous forward voltage at 5.0A	$V_F$	0.55			0.65		V
Maximum DC reverse current at rated DC blocking voltage	$I_R$	1.0 30.0					mA
Typical junction capacitance (Note 1)	$C_J$	550					pF
Typical thermal resistance (Note 2)	$R_{JC}$	3.0					°C/W
Operating junction temperature range	$T_J$	-65 to +125					°C
storage temperature range	$T_S$	-65 to +150					°C

Notes: (1) Measured at 1MHz and applied reverse voltage of 4.0V D.C .  
(2) Thermal resistance from Junction to case.



**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002  
Certificate No. 05103



ISO 14001  
Certificate No. 7116



ISO 9001 : 2000  
Certificate No. 555-100000000

Dated : 18/12/2003

# S05A30 THRU S05A60

Fig. 1- Forward Current Derating Curve

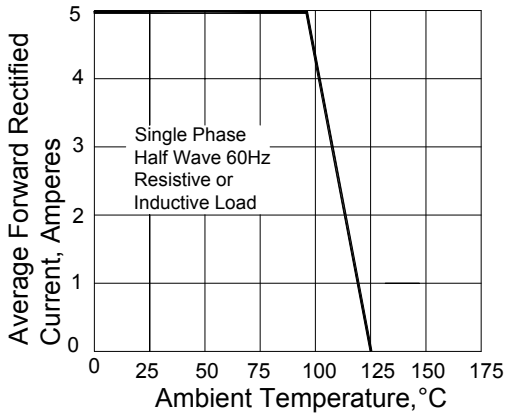


Fig.2-Maximum Non-repetitive Peak Forward Surge Current

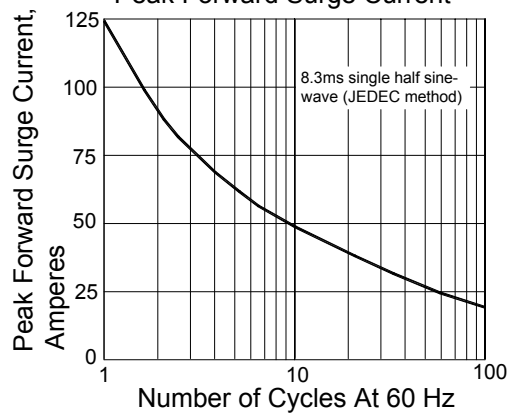


Fig. 3-Typical Instantaneous Forward Characteristics

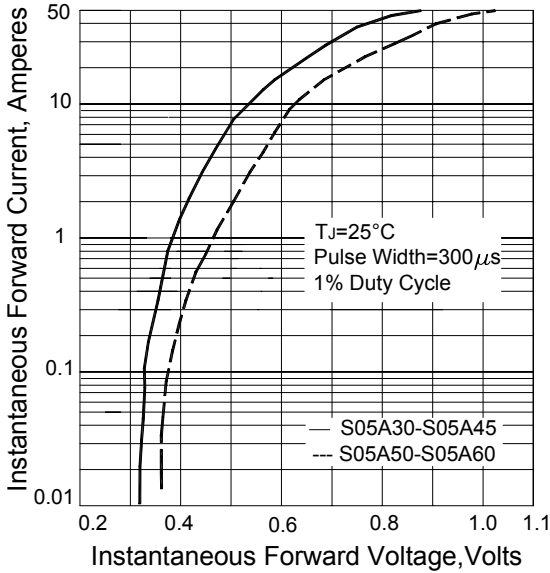


Fig. 4- Typical Reverse Characteristics

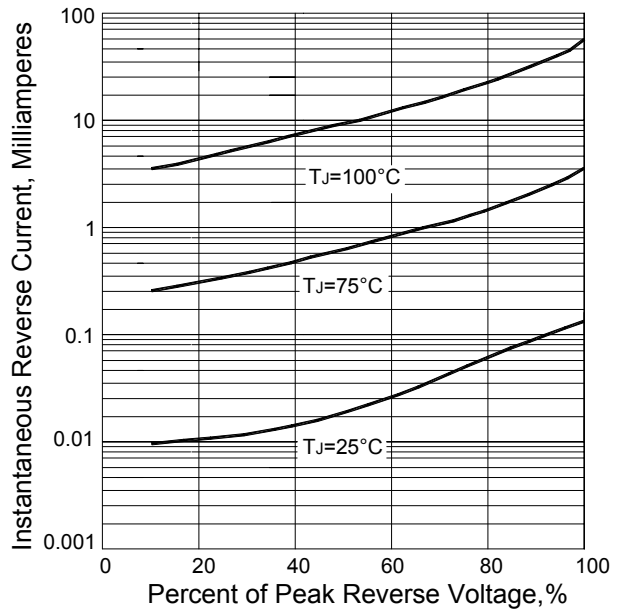


Fig. 5- Typical Junction Capacitance



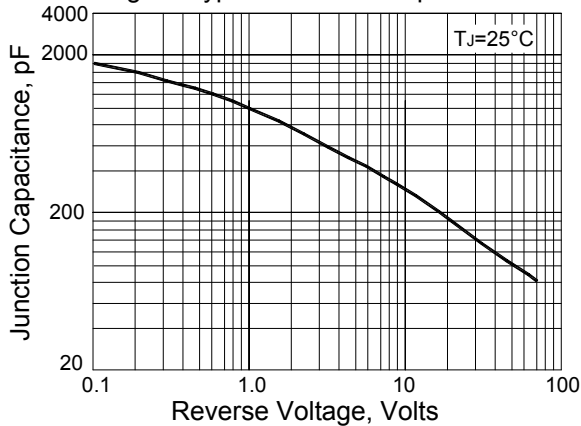


Fig. 6- Typical Transient Thermal Impedance



**SEMTECH ELECTRONICS LTD.**  
 (Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

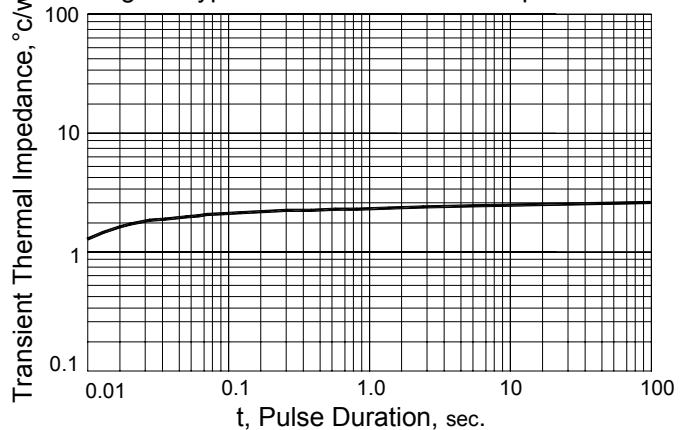