

LL700, LL700A


Silicon Epitaxial Planar Schottky Barrier Diodes

for ordinary wave detection
for super high speed switching

Features

- Low forward voltage and good wave detection efficiency
- Low reverse current

LL-34

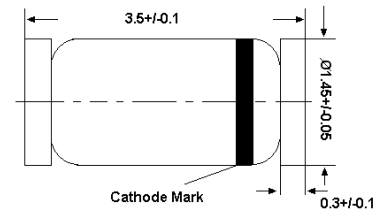


Glass case MiniMELF
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Rating	Unit
Peak Reverse Voltage	V_{RM}	15 30	V
Reverse Voltage	V_R	15 30	V
Forward Current	I_F	30	mA
Peak Forward Current	I_{FM}	150	mA
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 125	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$










Parameter	Symbol	Typ.	Max.	Unit
Forward Voltage at $I_F = 1\text{ mA}$ at $I_F = 30\text{ mA}$	V_F	- -	0.4 1	V
Reverse Current at $V_R = 15\text{ V}$ at $V_R = 30\text{ V}$	I_R	- -	100 150	nA
Total Capacitance at $V_R = 1\text{ V}$, $f = 1\text{ MHz}$	C_{tot}	1.3	-	pF
Reverse Recovery Time at $I_F = I_R = 10\text{ mA}$, $I_{rr} = 1\text{ mA}$, $R_L = 100\ \Omega$	t_{rr}	1	-	ns
Detection Efficiency at $V_{in} = 3\text{ V}_{(peak)}$, $f = 30\text{ MHz}$, $R_L = 3.9\text{ k}\Omega$, $C_L = 10\text{ pF}$	η	60	-	%



SEMTECH ELECTRONICS LTD.
(Subsidiary of Sino-Tech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)



LL700, LL700A

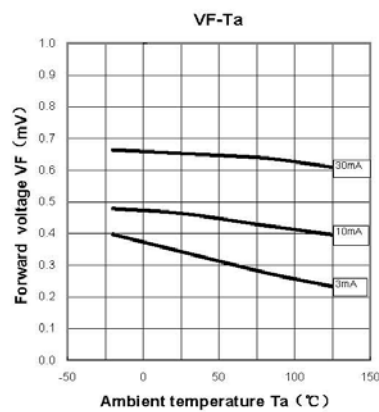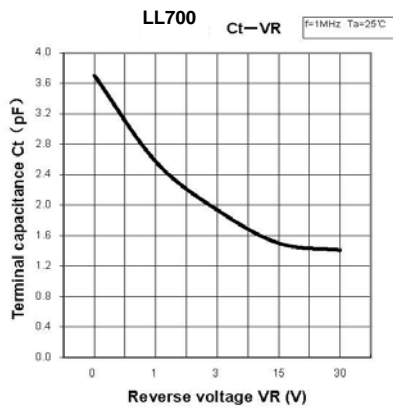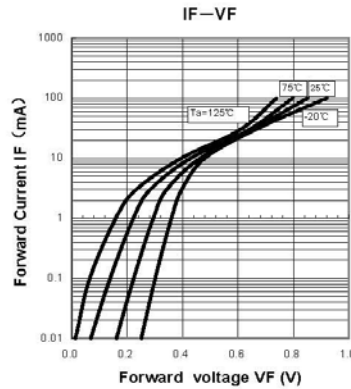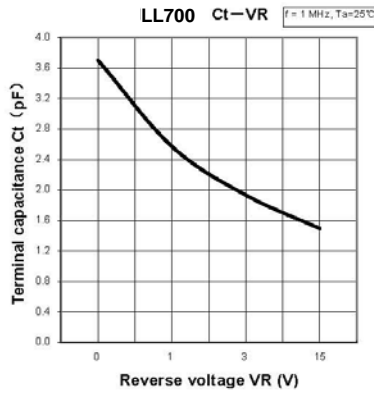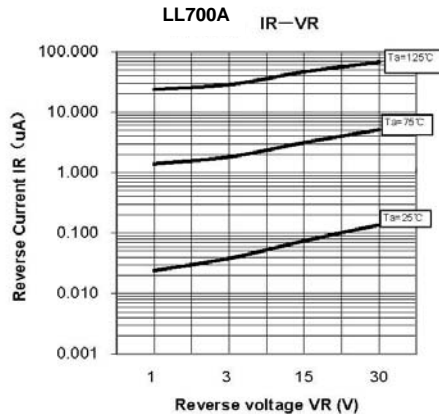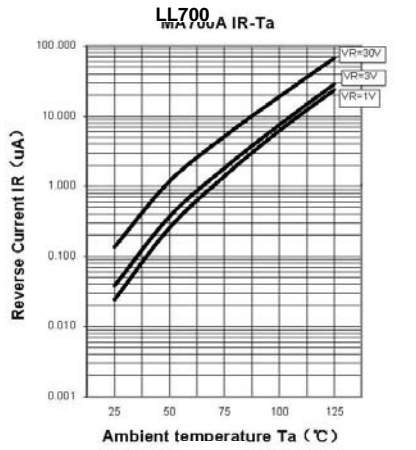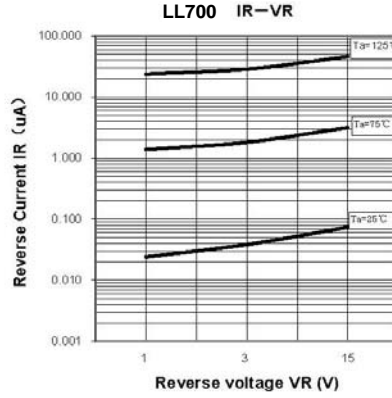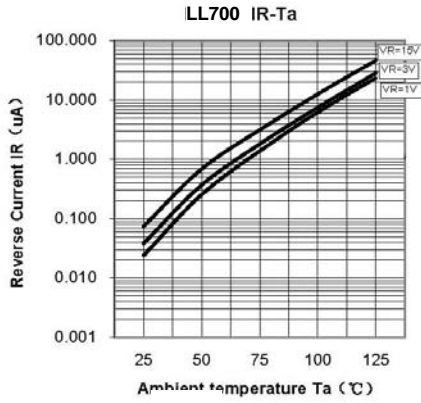

SEMTECH ELECTRONICS LTD.
(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 18949 : 2002
Certificate No. 05103

ISO 14001 : 2004
Certificate No. 7116

ISO 9001 : 2008
Certificate No. 050808

BS-CHAS 18001 : 2007
Certificate No. 7116

IECQ QC 080000
DIN EN ISO 9001:2008