



MMDT1N434

NPN Silicon Epitaxial Planar Transistor

for switching and interface circuit and drive circuit applications

Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process

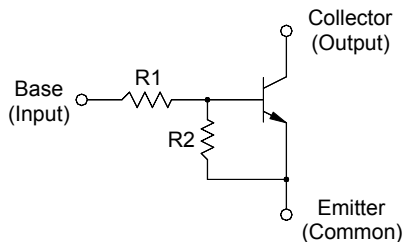


Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	50	V
Collector Emitter Voltage	V_{CEO}	50	V
Emitter Base Voltage	V_{EBO}	6	V
Collector Current	I_C	100	mA
Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 5\text{ V}$, $I_C = 5\text{ mA}$	h_{FE}	50	-	-	-
Collector Base Cutoff Current at $V_{CB} = 50\text{ V}$	I_{CBO}	-	-	0.1	μA
Collector Emitter Breakdown Voltage at $I_C = 100\text{ }\mu\text{A}$	$V_{(BR)CEO}$	50	-	-	V
Collector Emitter Saturation Voltage at $I_C = 10\text{ mA}$, $I_B = 0.5\text{ mA}$	$V_{CE(sat)}$	-	-	0.3	V
Input On Voltage at $V_{CE} = 0.2\text{ V}$, $I_C = 5\text{ mA}$	$V_{I(on)}$	-	-	1.7	V
Input Off Voltage at $V_{CE} = 5\text{ V}$, $I_C = 100\text{ }\mu\text{A}$	$V_{I(off)}$	0.5	-	-	V
Input Resistor	R_1	3.29	4.7	6.11	$\text{K}\Omega$
Input Resistor	R_2	15.4	22	28.6	$\text{K}\Omega$
Resistance Ratio	R_2 / R_1	3.6	4.5	5.5	-
Transition Frequency at $V_{CE} = 10\text{ V}$, $-I_E = 5\text{ mA}$, $f = 100\text{ MHz}$	f_T	-	250	-	MHz



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 14/01/2008