


ST 78L15U

3-Terminal positive voltage regulator



1. Output 2. Common 3. Input
SOT-89 Plastic Package



Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Input Voltage	V_{IN}	35	V
Power Dissipation	P_{tot}	800 ¹⁾	mW
Operating Temperature	T_{opr}	- 30 to + 75	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

¹⁾ 15 mm X 25 mm X 0.7 mm alumina ceramic board, $T_a \leq 25\text{ }^\circ\text{C}$

Electrical Characteristics (Unless otherwise specified, $V_{IN} = 23\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $T_j = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Output Voltage	V_{OUT}	14.4	15	15.6	V
Output Voltage $17.5\text{ V} \leq V_{IN} \leq 30\text{ V}$, $1\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	V_{OUT}	14.25	-	15.75	V
Output Voltage $V_{IN} = 23\text{ V}$, $1\text{ mA} \leq I_{OUT} \leq 70\text{ mA}$	V_{OUT}	14.25	-	15.75	V
Input Regulation $17.5\text{ V} \leq V_{IN} \leq 30\text{ V}$ $19\text{ V} \leq V_{IN} \leq 30\text{ V}$	Reg. line	-	-	300 250	mV
Load Regulation $1\text{ mA} \leq I_{OUT} \leq 100\text{ mA}$ $1\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	Reg. load	-	-	150 75	mV
Quiescent Current	I_Q	-	-	6.5	mA
Quiescent Current Change $19\text{ V} \leq V_{IN} \leq 30\text{ V}$ $1\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	ΔI_Q	-	-	1.5 0.1	mA
Output Noise Voltage at $T_a = 25\text{ }^\circ\text{C}$, $10\text{ Hz} \leq f \leq 100\text{ KHz}$	V_{NO}	-	90	-	μV
Ripple Rejection at $f = 120\text{ Hz}$, $18.5\text{ V} \leq V_{IN} \leq 28.5\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$	RR	34	-	-	dB
Dropout Voltage at $T_j = 25\text{ }^\circ\text{C}$	$ V_{IN} - V_{OUT} $	-	1.7	-	V

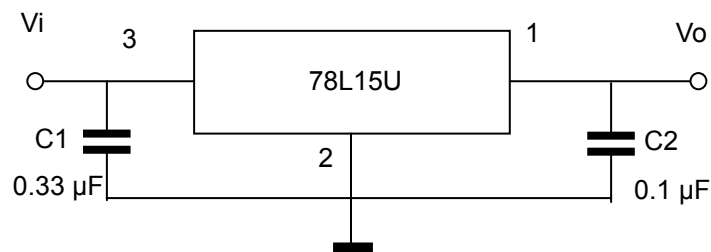

SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited

