

SDA06WS


SILICON EPITAXIAL PLANAR SCHOTTKY BARRIER DIODE

Features

- Small surface mounting type
- High reliability

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode






Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	V_{RM}	25	V
Reverse Voltage	V_R	20	V
Average Forward Rectified Current	I_O	100	mA
Peak Forward Current	I_{FM}	200	mA
Peak Forward Surge Current (60 Hz for 1 Cyc.)	I_{FSM}	1	A
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 125	$^\circ\text{C}$

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Typ.	Max.	Unit
Forward Voltage at $I_F = 100\text{ mA}$	V_F	-	0.44	V
Reverse Current at $V_R = 20\text{ V}$	I_R	-	25	μA
Capacitance Between Terminals at $V_R = 10\text{ V}$, $f = 1\text{ MHz}$	C_T	8	-	pF

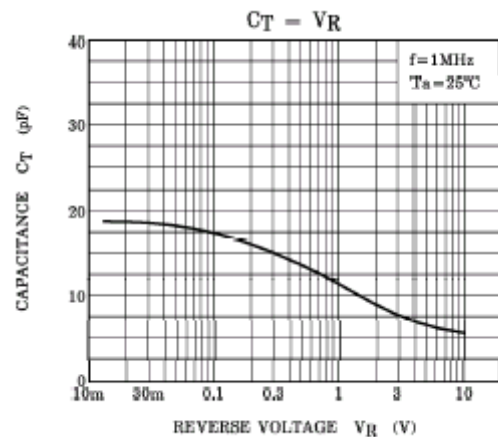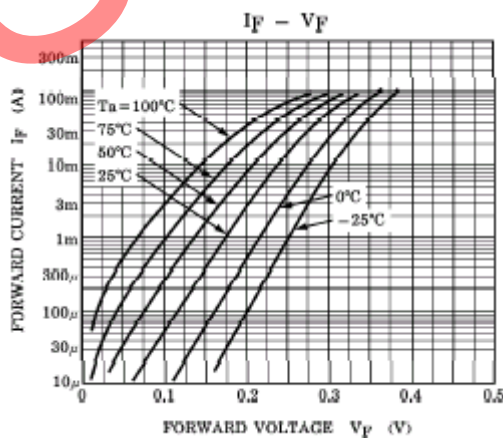

SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited





Dated : 22/04/2008

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-323

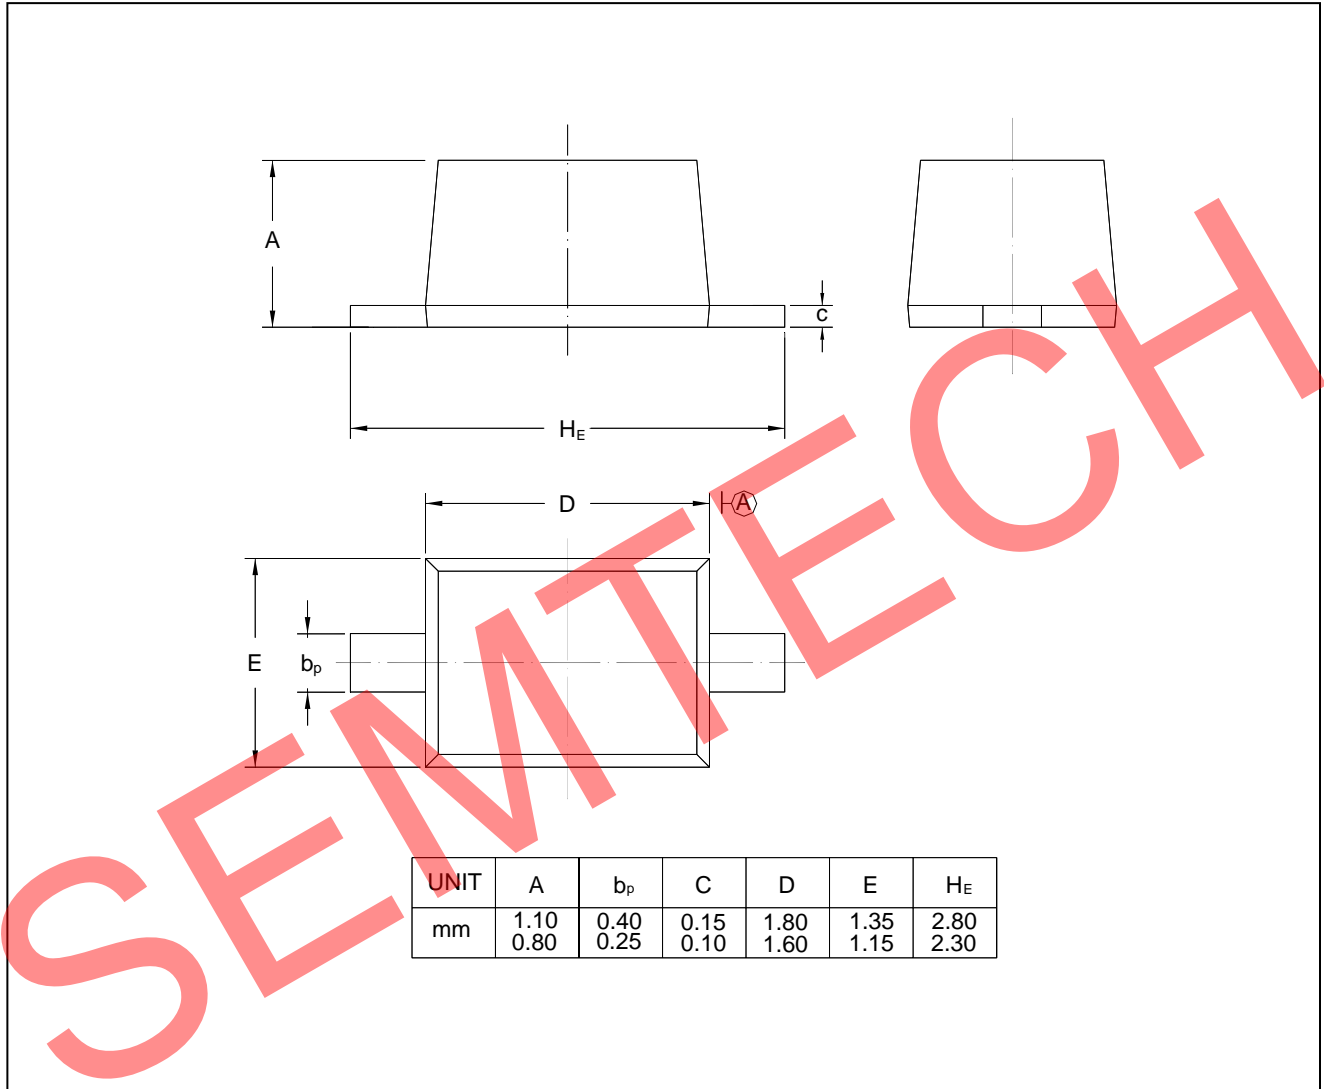

SEMTECH ELECTRONICS LTD.
 Subsidiary of Sino-Tech International (BVI) Limited



Dated : 22/04/2008